



Theoretical investigation of two-wave mixing in a broad-area semiconductor amplifier with moving gratings

Chi, Mingjun; Huignard, J.-P.; Petersen, Paul Michael

Publication date:
2008

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Chi, M., Huignard, J.-P., & Petersen, P. M. (2008). *Theoretical investigation of two-wave mixing in a broad-area semiconductor amplifier with moving gratings*. Abstract from Danish Optical Society Annual Meeting 2008, Nyborg, Denmark. http://www.risoe.dtu.dk/rispubl/art/2008_85.pdf

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Theoretical investigation of two-wave mixing in a broad-area semiconductor amplifier with moving gratings

Mingjun Chi,^{1*} Jean-Pierre Huignard,² and Paul Michael Petersen¹

¹Department of Photonics Engineering, Technical University of Denmark, P.O. Box 49, DK-4 000 Roskilde, Denmark

²Thales Research & Technology, RD 128 91767, Palaiseau Cedex, France

Abstract: The two-wave mixing in a broad-area semiconductor amplifier with moving gratings is investigated theoretically, where a pump beam and a signal beam with different frequencies are considered, thus both a moving phase grating and a moving gain grating are induced in the amplifier. The coupled-wave equations of two-wave mixing are derived based on the Maxwell's wave equation and rate equation of the carrier density. The analytical solutions of the coupled-wave equations are obtained in the condition of small signal when the total intensity is far below the saturation intensity of the amplifier. The results show that the optical gain of the amplifier is affected by both the moving phase grating and the moving gain grating, and there is energy exchange between the pump and signal beams. Depending on the moving direction of the gratings and the anti-guiding parameter, the optical gain may increase or decrease due to the two-wave mixing.

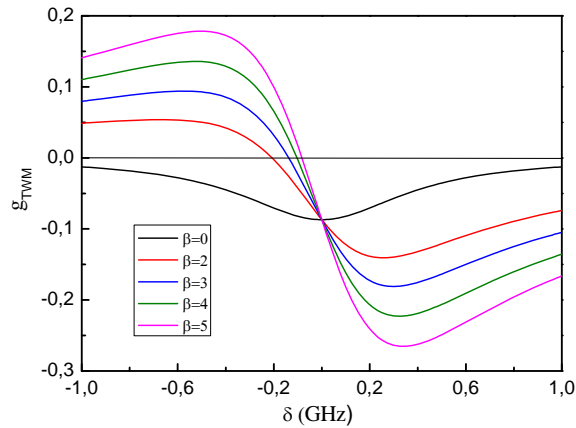


Fig. 1. The two-wave mixing gain g_{TWM} versus frequency difference between signal and pump δ with different anti-guiding parameter β .